

# NETWORK CABINETS



## Standard

- Comply with ANSI/EIA RS-310-D, IEC60297-2, DIN41494; PART1; DIN41494;PART7

## Material

- SPCC Cold Rolled Steel;
- 19" rails: 2.0mm, side panel:1.0mm others: 1.2mm

## Colour

- RAL7035
- RAL9004

## Loading Capacity

- Static loading: 800KG

## Feature

- Exquisite design with precise dimension and craftsmanship;
- Several styles of front and rear doors options available;
- Adjustable feet and heavy duty castors are available simultaneously;
- Cable entry on the top cover and bottom panel with adjustable sizes ;
- Optional installation of plinth to enable cabinets fixation, under-base cable entry/ventilation;
- Efficient and reliable cabinet connection by baying kit;
- Removable side panels to ease maintain.




- Front & rear door  
Tempered glass door.  
Small lock;  
Reversible right or left handed doors;  
Turning angle is over 180 degrees;
- Material:  
Sheet steel  
5MM safety glass
- Surface Finish: Powder coated
- Color: RAL7035;RAL9004



- Front & rear door  
Sheet steel door.  
Small lock;  
Reversible right or left handed doors;  
Turning angle is over 180 degrees;
- Material:  
Sheet steel
- Surface Finish: Powder coated
- Color: RAL7035; RAL9004

## Main Part

S/N	Specification	Qty	Material	Surface Finish	Remark
1	Rear door	1	----	----	See front&rear door type
2	Side panel	2	SPCC t1.0	Powder coated	Small round lock
3	19" rails	4	SPCC t2.0	zinc-plated	
4	Mounting angle	4/6	SPCC t1.2	Powder coated	6pcs for over 33U
5	Top cover	1	SPCC t1.2	Powder coated	
6	Frame	2	SPCC t1.2	Powder coated	
7	Cable management snot	2	SPCC t1.0	Powder coated	Only used for 800 width cabinet
8	Front door	1	----	----	See front&rear door type
9	Mounting spacer	8/12	SPCC t1.2	Powder coated	Only used for 800 width cabinet : 6pcs for over 33U
10	Bottom	1	SPCC t1.2	Powder coated	
11	cable entry panel	4	SPCC t1.2	Powder coated	
12	2" heavy duty castor	4	----	----	----
<b>hardware kits with cabinet:</b>					
A	M12 adjustable feet	4	Steel	Zinc-plated	Height:100MM
B	M6 screw& nuts	20/40	Steel	Zinc-plated	40pcs for over 33U
C	Trox tooling	1	Steel	Zinc-plated	----

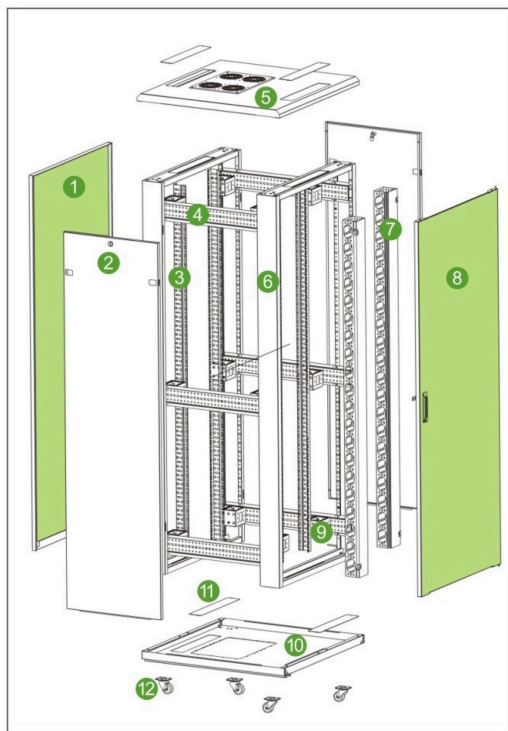

- Right-angled frame enables users to easily place the logo.
- Easily connected and removed earth cable available.

## Definition Of Code

Definition of color:0-RAL7035; 1-RAL9004

Definition of rear door:  
 0-Tempered glass door;  
 1-Tempered glass door with striped hole;  
 2-Tempered glass door with hexagon hole;  
 3-Sheet steel door;  
 4-Sheet steel door with hexagon hole;  
 5-High-density vented door;

Definition of front door:  
 0-Tempered glass door;  
 1-Tempered glass door with striped hole;  
 2-Tempered glass door with hexagon hole;  
 3-Sheet steel door;  
 4-Sheet steel door with hexagon hole;  
 5-High-density vented door;

Cabinet capacity:(U)

Cabinet depth:(MM): 6=600;8=800;9=900;  
 0=1000;1=1100;2=1200

Cabinet width:(MM): 6=600;8=800