


rotronic

Datenblatt - Fiche technique - Data sheet

11.03.1554

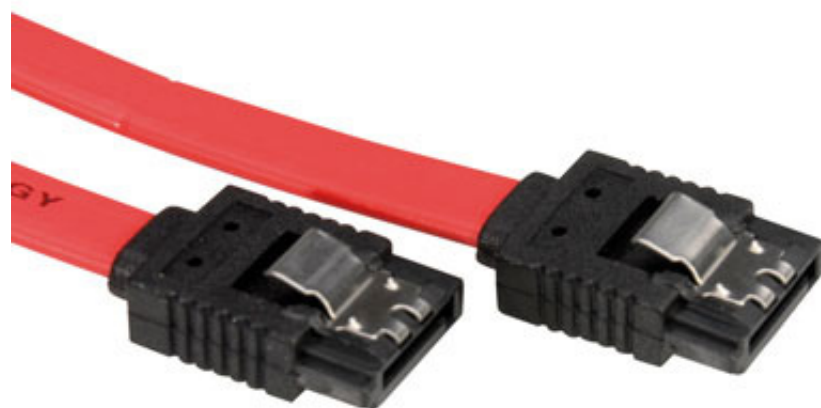



**ROLINE Int. SATA 3.0 Gbit/s HDD-Kabel mit Schnappverschluss,
0,5m**

ROLINE Câble SATA 3.0 Gbit/s interne avec attache, 0,5 m

ROLINE Internal SATA 3.0 Gbit/s Cable with Latch, 0.5 m

ROHS-COMPLIANT

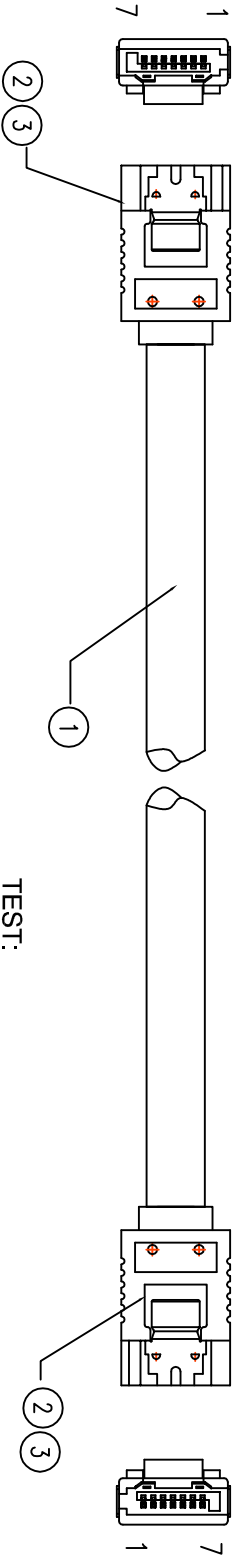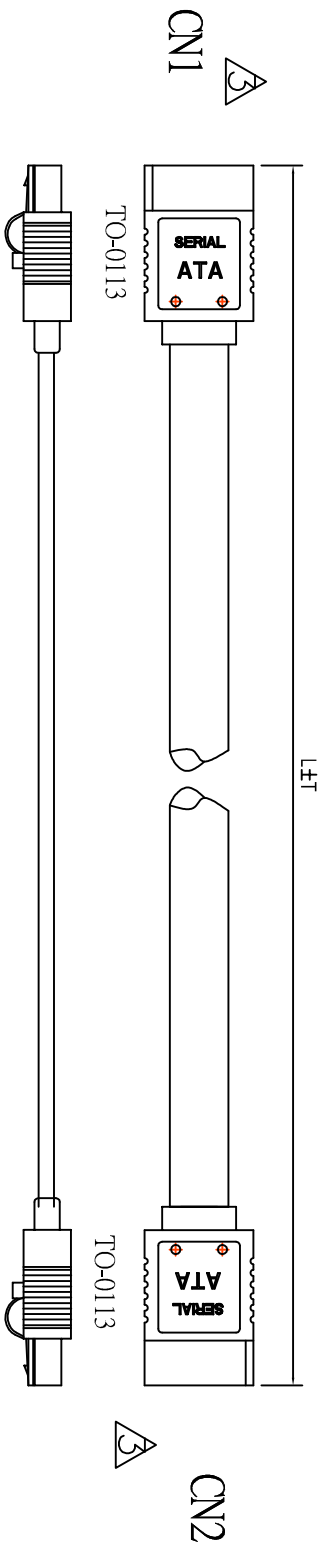


LTR	REV.	DESCRIPTION	DATE
 *2	F	ECR #080409-2 EDIT PACKING,ADD BAR CODE	04/09/08'
 *2	G	ECR #080618-3 EDIT PACKING,ADD BARCODE NO.	06/18/08'



WIRING TABLE

CN1		CN2
1	DRAIN WIRE	1
2		2
3		3
4	DRAIN WIRE	4
5		5
6	DRAIN WIRE	6
7		7

140-1265-2	11.03.1559-50	1000±20	7611990168514
140-1265-1	11.03.1554-50	500±10	7611990168507
DWG	P/N	L±T(mm)	BAR CODE NO.

- TEST:
- 100% OPEN & SHORT WITH MISS WIRE TEST
 - TEST CONDITION:
 - CONDUCTANCE RESISTANCE: 5 ohm.
- TEST CONDITION:
- CONDUCTANCE RESISTANCE: 5 ohm.
 - SHORT OPEN DETERMINANT: 20K ohm.
 - INSULATION RESISTANCE: 5M ohm AT DC 300V.
- PACKING: EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL.
   50 PCS / CTN.

ITEM	DESCRIPTION	QTY
3	OUTER MOLD:35P PVC BLACK	A/R
2	SATA 7P G/F BLACK, W/SPRING (WITH LATCH)	2SETS
1	UL2725(26AWG*2C+2D+AE)*2C OD:2.2*7.8MM RED(PANTONE 200C)	A/R

Tolerance Inch M/M		Title	
X	.015	SATA W/LATCH CABLE STRAIGHT TO STRAIGHT	
.XX	.010	DRAWN	
.XXX	.005	DATE	
.05		DRAWN	
PAN/IE 06/18/08'		CUSTOMER P/N:	
Check		App'd	
Engr		Scale NONE	
Dwg No. 140-1265		Units m/m	
		Third Angle Projection	
		REV:G	
		Sheet 1/1	

Rotronic Co., Ltd.