


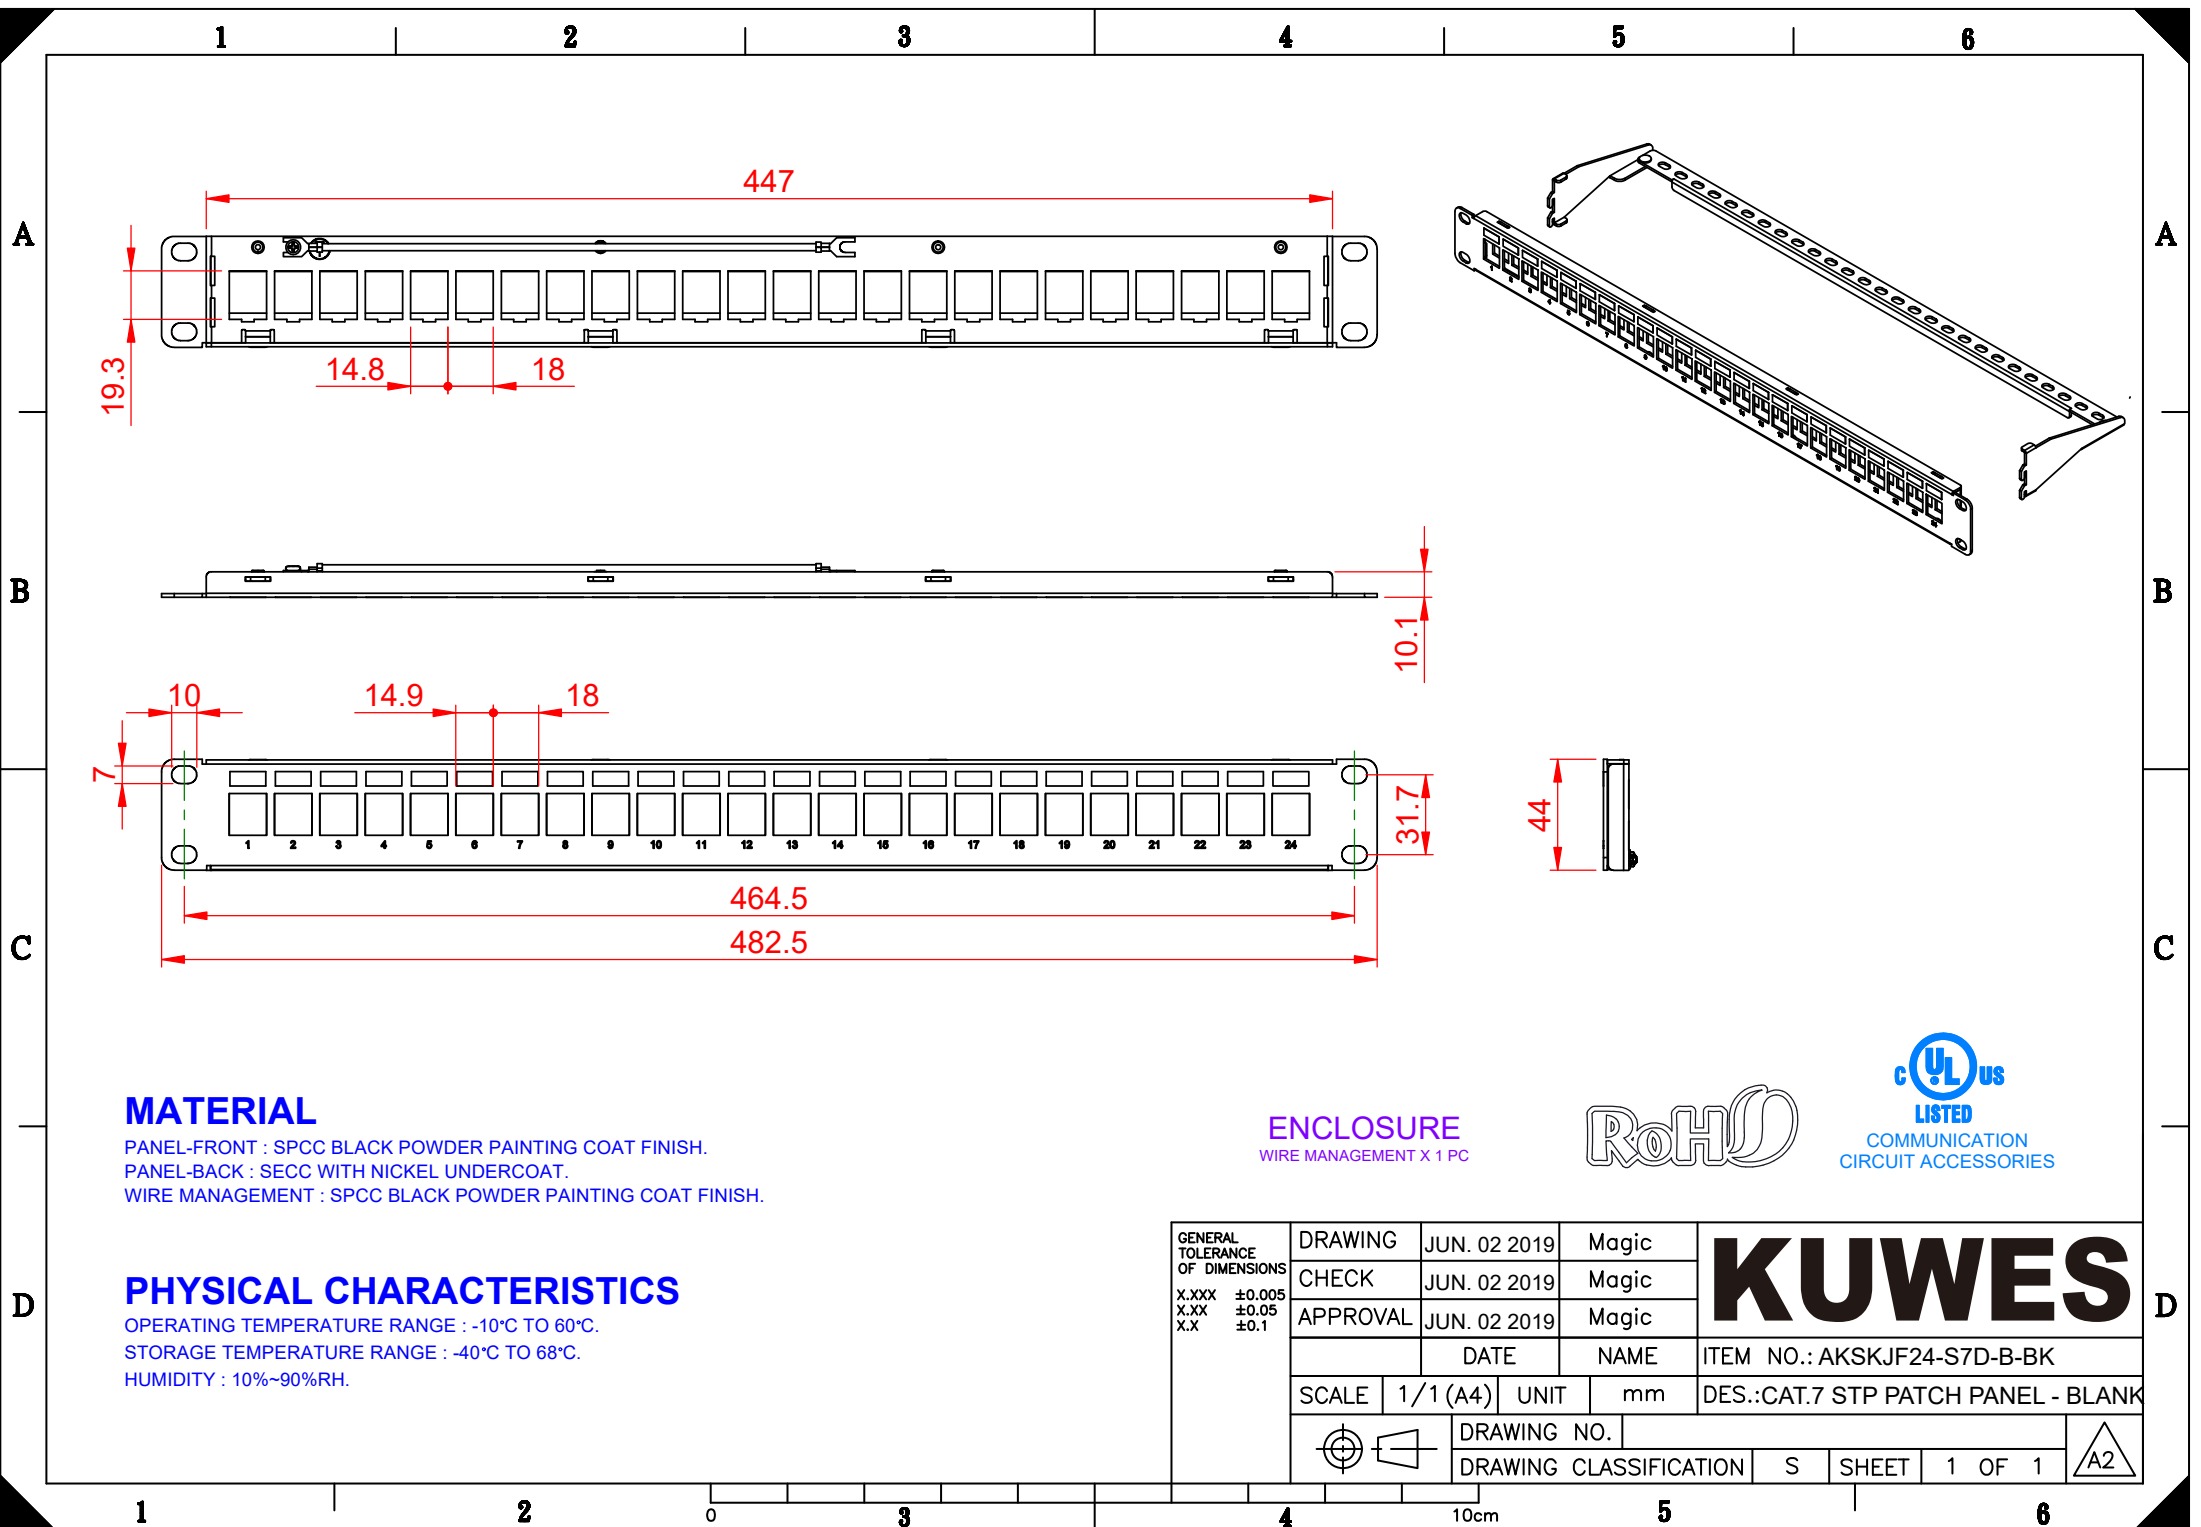


MATERIAL

PANEL-FRONT : SPCC BLACK POWDER PAINTING COAT FINISH.
PANEL-BACK : SECC WITH NICKEL UNDERCOAT.
WIRE MANAGEMENT : SPCC BLACK POWDER PAINTING COAT FINISH.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%~90%RH.

ENCLOSURE
WIRE MANAGEMENT X 1 PC

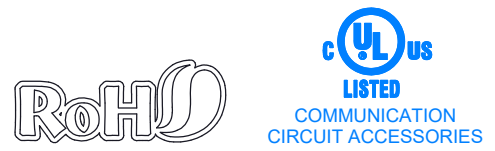

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		JUN. 02 2019		Magic		KUWES					
	CHECK		JUN. 02 2019		Magic							
	APPROVAL		JUN. 02 2019		Magic							
			DATE		NAME		ITEM NO.: AKSKJF24-S7D-B-BK					
	SCALE	1/1 (A4)		UNIT	mm		DES.:CAT.7 STP PATCH PANEL - BLANK					
			DRAWING NO.									
			DRAWING CLASSIFICATION			S	SHEET		1 OF 1			